

LOT LEGEND



ROLL No.	OWNERSHIP	HECTARES
1) 020-159	A. & J. Dekroger	2.02
2) 020-156-01	J. & E. Gough	1.16
3) 020-156-02	M. Berkemans	0.21
4) 020-156	D. Gray	0.23
5) 020-119-20	R. & D. Armstrong	1.17
6) 020-123-10	M. & K. Van Noord	1.16
7) 020-127	S. Platz, T. Keller	0.40
8) 020-127-01	B. Stover, L. Egan	0.44
9) 020-198-04	D. & M. Gibson	0.56

GENERAL NOTES

- OUR SPECIFICATIONS DATED NOVEMBER 2000 APPLY TO THIS PROJECT.
- THE WORKING WIDTH AVAILABLE TO THE CONTRACTOR TO CONSTRUCT THE NEW DRAINS SHALL CONSIST OF THOSE LANDS IMMEDIATELY ADJACENT TO THE DRAIN AND CONNECTIONS AND SHALL NOT EXCEED THE FOLLOWING AVERAGE WIDTHS:
CLOSED PORTIONS - 15 meters
CLOSED PORTIONS (THROUGH BUSH) - 20 meters
THE WORKING WIDTH FOR PURPOSES OF FUTURE MAINTENANCE SHALL BE THE SAME AS ABOVE EXCEPT FOR CLOSED PORTIONS (NOT THROUGH BUSH) SHALL BE 10m.
- ALL OWNERS ALONG THE COURSE OF THE DRAIN SHALL MAKE AN ACCESS ROUTE FROM THE NEAREST ROAD TO THE DRAIN LOCATION AVAILABLE TO THE CONTRACTOR THE AVERAGE WIDTH OF THIS ROUTE SHALL NOT EXCEED 8 METERS. THE ACCESS ROUTE SHALL ALSO APPLY FOR FUTURE MAINTENANCE PURPOSES.
- ALL UTILITIES TO BE LOCATED AND EXPOSED PRIOR TO CONSTRUCTION SO THAT THE NEW TILE GRADES CAN BE CONFIRMED. IF THERE IS A CONFLICT IN ELEVATION BETWEEN THE PROPOSED DRAIN AND THE UTILITY, THE ENGINEER IS TO BE NOTIFIED IMMEDIATELY.
a) CONTRACTOR TO NOTIFY ALL UTILITIES 12 HOURS PRIOR TO HIS SCHEDULED TIME FOR STARTING THE ABOVE WORK.

- ALL TREES, SCRUB, BRUSH, ETC. TO BE CLEARED AND GRUBBED IN ACCORDANCE WITH "SECTION B. 3 AND C. 4" SPECIFICATIONS. CLEARING TO BE 20m WIDE.
 - RIP-RAP TO BE SUPPLIED AND INSTALLED IN ACCORDANCE WITH "SECTION A. 29" IN THE SPECIFICATIONS.
 - CONTRACTOR TO ARRANGE A PRE-CONSTRUCTION MEETING WITH THE ENGINEER, DRAINAGE SUPERINTENDENT, AND THE AFFECTED OWNERS. ALL PARTIES SHALL RECEIVE 48 HOURS NOTICE TO THE MEETING.
- CLOSED PORTIONS**
- ALL CONCRETE AND PLASTIC TILE AND PIPE TO CONFORM TO "SECTION C. 1" IN THE SPECIFICATIONS. PLASTIC SEWER PIPE SHALL BE BIG "O" "POLY-TITE" OR APPROVED EQUALS.
 - ALL CATCHBASINS SHALL BE SUPPLIED AND INSTALLED IN ACCORDANCE WITH "SECTION C. 16" IN THE SPECIFICATIONS, EXCEPT AS FOLLOWS:
a) ALL CATCHBASIN LEADS TO BE CONNECTED TO NEW TILE DRAIN WITH PRE-FABRICATED "WYE".
b) EXACT LOCATION OF NEW DRAIN TO BE DETERMINED AT TIME OF CONSTRUCTION BY DRAINAGE SUPERINTENDENT OR ENGINEER.

GENERAL NOTES - CONT'D on DWG No. 2

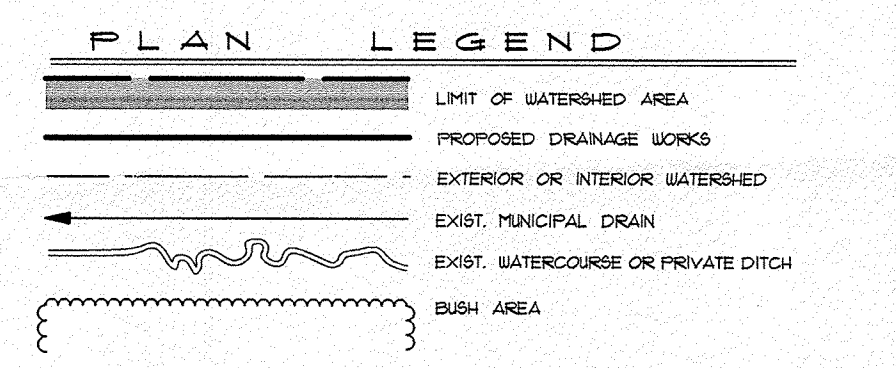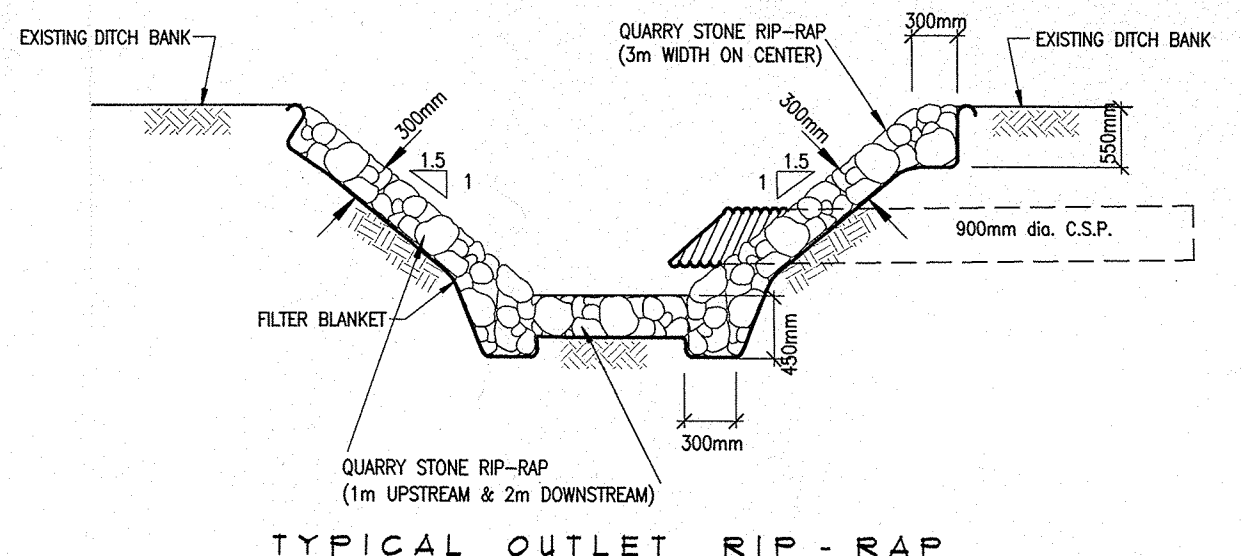

Drainage Superintendent: DON WEIR (713-5344)

HAWES DRAIN
TOWNSHIP OF MALAHIDE

Drawn By: JMS	Field Book	JOB No.	Drawing No.
Date: FEB. 4, 2003	B-138	202160	1 of 2

SPRIET ASSOCIATES
LONDON CONSULTING ENGINEERS LIMITED
155 YORK STREET - LONDON (519) 672-4100 - M6A 1A8